
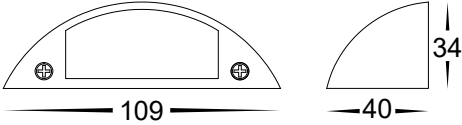
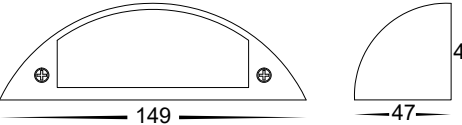


Curva Wall Light Installation Instructions

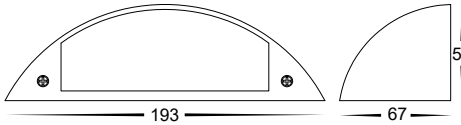

Product Specifications

Model No.	HV3251T-AB-12V	HV3251T-BLK-12V	HV3251T-BR-12V	HV3251T-WHT-12V	HV3252T-AB-12V	HV3252T-BLK-12V	HV3252T-BR-12V	HV3252T-WHT-12V	HV3253T-AB-12V	HV3253T-BLK-12V	HV3253T-BR-12V	HV3253T-WHT-12V
Name	Curva				Curva				Curva			
Material	Solid Brass	Solid Brass	Solid Brass	Solid Brass	Solid Brass	Solid Brass	Solid Brass	Solid Brass	Solid Brass	Solid Brass	Solid Brass	Solid Brass
Colour	Antique Brass	Black	Brass	White	Antique Brass	Black	Brass	White	Antique Brass	Black	Brass	White
IP Rating	IP65				IP65				IP65			
IK Rating	IK06				IK06				IK06			
Installation Type	Wall - Surface Mounted				Wall - Surface Mounted				Wall - Surface Mounted			
Input Voltage	12v DC - Constant Voltage				12v DC - Constant Voltage				12v DC - Constant Voltage			
Protection Class	3 (Low Voltage - no earth required)				3 (Low Voltage - no earth required)				3 (Low Voltage - no earth required)			
Lamp Base	Built in LED				Built in LED				Built in LED			
Lamp Wattage	1x 3w				1x 5w				1x 7.5w			
Colour Temp	Tri Colour - 3000k, 4000k, 5500k				Tri Colour - 3000k, 4000k, 5500k				Tri Colour - 3000k, 4000k, 5500k			
Lumens	240lm, 245lm, 250lm				400lm, 450lm, 425lm				600lm, 650lm, 625lm			
CRI	> 80				> 80				> 80			
Wiring	Parallel				Parallel				Parallel			
Dimmable	Yes				Yes				Yes			
Warranty	3 Years Replacement*				3 Years Replacement*				3 Years Replacement*			

HV3251T Dimensions	HV3252T Dimensions	HV3253T Dimensions
		


Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- When installing low voltage fittings, Voltage to fitting must be within +or- 5% of voltage required and cannot be installed more than 25m from LED Driver, if not within this allowance warranty will be voided.
- When installing brass fittings, gloves must be worn to avoid any oils transferring to fitting.
- All 316 stainless steel fittings must have regular cleaning maintenance to avoid any tea staining from forming on fitting. (Warranty does not cover Tea Staining)
- Aluminium, 304SS, Powder Coated Brass/316SS fittings must not be installed within 5km of any salt water environments including pools.
- All o-rings and seals must be in place correctly to maintain warranty.
- These instructions may be updated at any time due to product improvements, Please visit website for most current installation instructions.

Steps for Installation:

- Make sure that the electrical circuit is free of voltage (master switch off)
- Remove base plate from fitting by loosening allen screws on side of fitting.
- Install mounting bracket in desired location using appropriate screws for application.
- Using an appropriate 12v DC Constant Voltage LED Driver - DO NOT CONNECT LIGHT FITTING DIRECTLY TO 240V
- Connect the cable - If more than one fitting installed, wiring must be done in parallel.
- Strip back the cable on both fitting and cable run and twist the positive cables together.
- Neutral cables are marked for selection of colour temperature. If 3000k or 5500k is selected you must terminate extra cable to be IP Rated to avoid any water making contact with internal parts of cable. To get 4000k, Join both 3000k + 5500k together and connect to neutral on cable run.
- Solder all joins using solder and either a heat gun or butane gas torch.
- Cover connections using an adhesive lined heat shrink or gel cap to make connection water-tight. Failure to do this will void warranty.
- Heat the heat shrink or crimp the gel cap making sure all connections are covered.
- Reattach fitting to base plate making sure screws are tight to avoid water penetration
- If installed outdoors apply silicon around edge of fitting to prevent any water from getting inside to electrical connections.
- All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Wiring Diagram

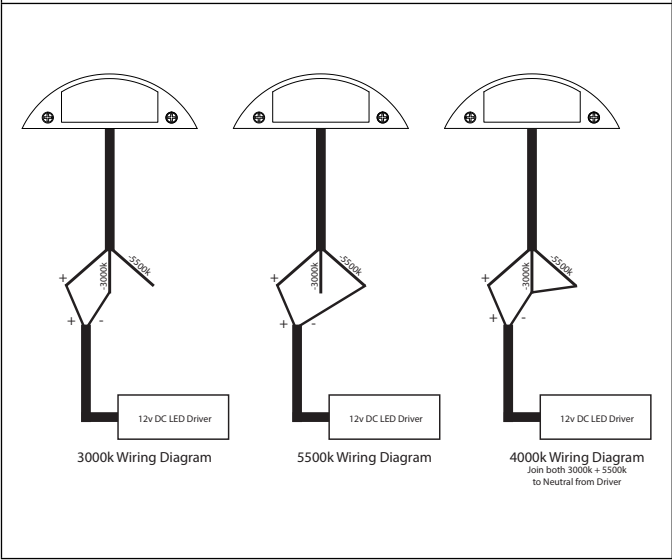

Must be installed by a licensed electrician

Contact Details:

143 Beauchamp Road
Matraville NSW 2036
Australia
Tel: 02 9381 8300
Fax: 02 9666 8881
Email: sales@havit.com.au
Web: www.havit.com.au

Warranty Terms & Conditions*



Additional Information

