
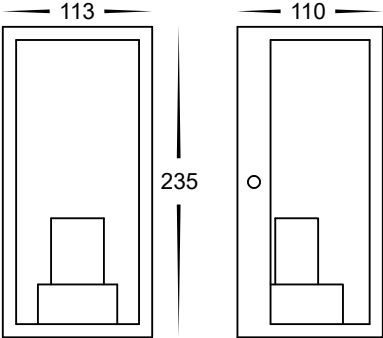
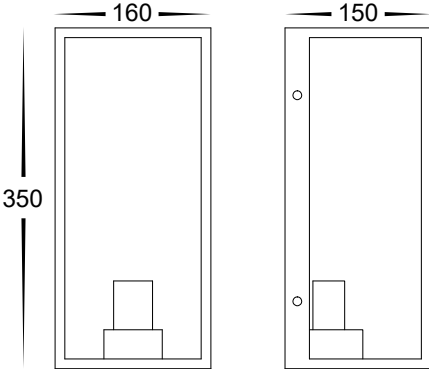


Bayside Wall Light Installation Instructions

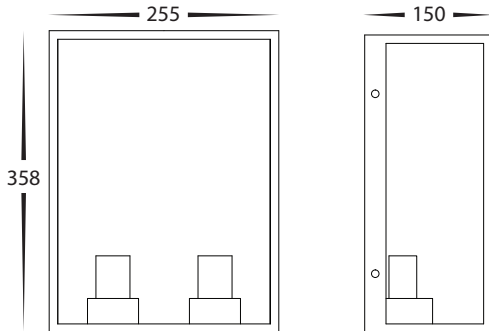

Product Specifications									
Model No.	HV3659W-BLK	HV3659W-WHT	HV3659W-SS316	HV3659W-L-BLK	HV3659W-L-WHT	HV3659W-L-SS316	HV36592W-BLK	HV36592W-WHT	HV36592W-SS316
Name	Bayside			Bayside			Bayside		
Material	316 Stainless Steel			316 Stainless Steel			316 Stainless Steel		
Colour	Black	White	Stainless Steel	Black	White	Stainless Steel	Black	White	Stainless Steel
IP Rating	IP54			IP54			IP54		
Installation Type	Wall - Surface Mounted			Wall - Surface Mounted			Wall - Surface Mounted		
Protection Class	1 (240v Requires Earth) 			1 (240v Requires Earth) 			1 (240v Requires Earth) 		
Input Voltage	240v AC			240v AC			240v AC		
Lamp Base	E27			E27			E27		
Lamp Wattage	1x 9w			1x 4w			2x 4w		
Colour Temp	2700k			2700k			2700k		
Lumens	800lm			400lm			2x 400lm		
CRI	> 80			> 80			> 80		
Wiring	Parallel			Parallel			Parallel		
Dimmable	Yes - Triac Dimmable			Yes - Triac Dimmable			Yes - Triac Dimmable		
Warranty	3 Years Replacement*			3 Years Replacement*			3 Years Replacement*		

HV3659W Dimensions	HV3659W-L Dimensions	HV36592W Dimensions
		

Important Safety Issues:
• This product must be installed by a qualified electrician according to AS/NZS 3000. • Ensure all electrical mains are disconnected before any installation. • Modification of this product will void any warranty. • Havit Lighting does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system. • All 316 stainless steel fittings must have regular cleaning maintenance to avoid any tea staining from forming on fitting. (Warranty does not cover Tea Staining). • All o-rings and seals must be in place correctly to maintain warranty • This form may be updated at any time due to product improvements, please check online installation form for most current version.

Steps for Installation:
1. Make sure that the electrical circuit is free of voltage (master switch off) 2. Install bracket to wall in desired location using appropriate screws for application. 3. Remove base from fitting by removing screws on side and set aside. 4. Connect the cable - use wire with earth; connect the earth first, then live and neutral wire. 5. Seal all holes including cable entry and around screws 6. Attach fitting to bracket making sure nuts are tight. 7. Attach front cover to base making sure screws are tight. 8. Apply silicon around edge of fitting to prevent any water from getting inside to electrical connections. 9. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Steps for changing globe:
1. Make sure that the electrical circuit is free of voltage (master switch off) 2. Remove the cover by removing screws on side of fitting and set aside, 3. Remove globe by twisting anti clockwise. 4. Re-insert the appropriate globe by inserting globe into lampholder and twist clockwise - (Make sure not to exceed max wattage, see product label for correct info. 5. Reattach front cover to base making sure screws are tight.

Must be installed by a licensed electrician

Contact Details:	Warranty Terms & Conditions*	Additional Information
143 Beauchamp Road Matraville NSW 2036 Australia Tel: 02 9381 8300 Fax: 02 9666 8881 Email: sales@havit.com.au Web: www.havit.com.au		