




Minimum clearance for luminaire

ⓘ **Risk of Fire** – Required clearance from structure members and building elements. Details below:

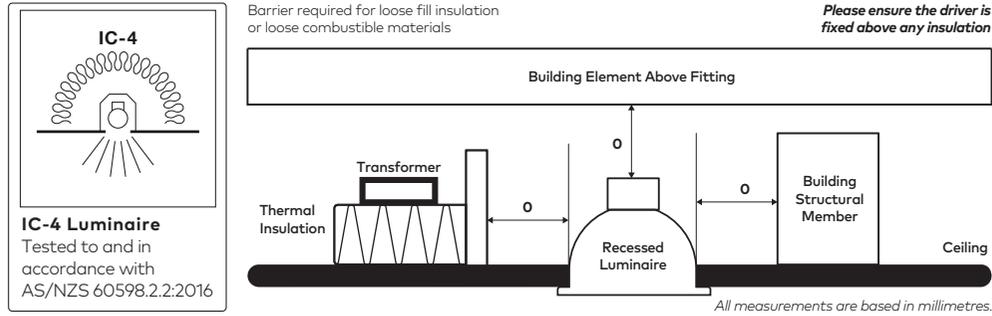

IC-4 Luminaire
Tested to and in accordance with AS/NZS 60598.2.2:2016

CA90 Model



CA 90 Luminaire
Tested to and in accordance with AS/NZS 60598.2.2:2016

Product Code
TITAO134.XXXX
TITAO084.XXDK
TITAO100.XXDK

For Large (134mm) and Dusk dimmable variations, the luminaire is CA90 rated.

Corrosion Protection

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire or chemical contact via installation will cause corrosion of the surface of the luminaire and will void the warranty.


Ambient Conditions

Recommended to install in an ambient temperature <35°C.



Cleaning

Warning: Before cleaning, disconnect from mains supply and allow luminaire to cool.

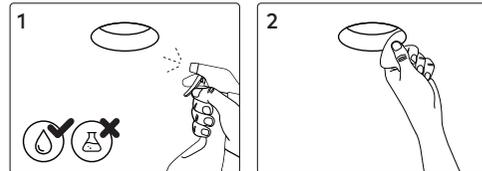

Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment)



Titanium G2

DOWNLIGHT


Base Codes	Small TITAO084	Medium TITAO100	Large TITAO134	97+ Small TI970084	97+ Medium TI970100	97+ Large TI970134	Power 11 13 25 Watts
	Class III Luminaire only	IP Rating 44 (Roomside)	Material Aluminium	Install Person/s 1x			

ⓘ **CAUTION** – This product must be installed by a qualified installer
Please read instruction manual carefully before installing luminaire

Surge Protection
For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty

Please read these installation instructions carefully before installing this luminaire. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation. Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This luminaire will not be used as a 'Working light' during construction. This will result in the warranty of the luminaire to be void. For warranty duration, please refer to the data sheet.



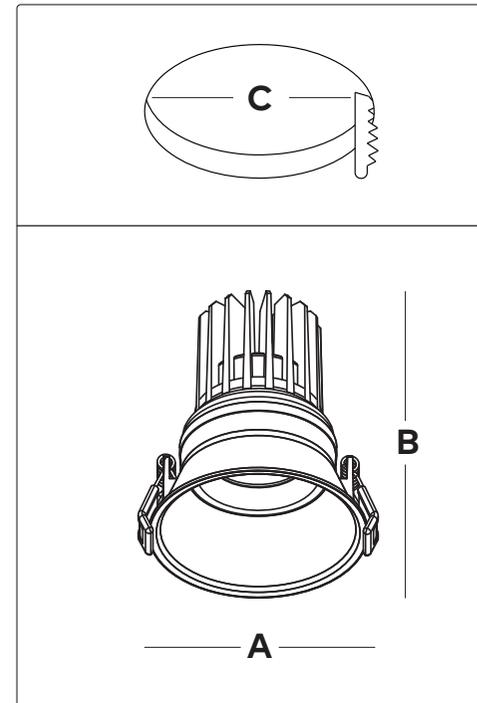


Sizing Variations




Product Code	A	B	C
TITAO084	84	107	76
TITAO100	100	116	92
TITAO134	134	145	125
TI970084	84	107	76
TI970100	100	116	92
TI970134	134	145	125
Accessories			
TA020/TA021	100	130	92
TA024/TA025	110	115	102

All measurements are in millimetres.





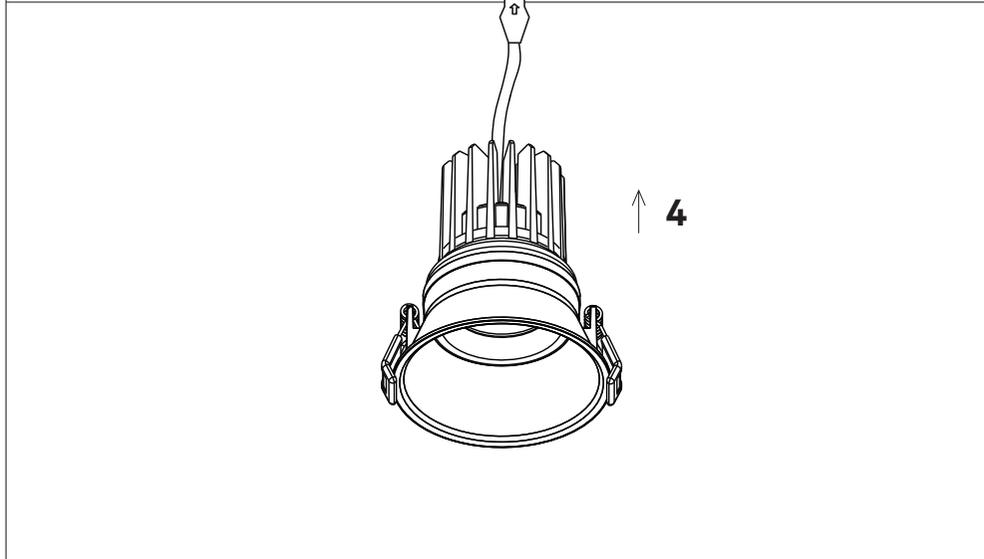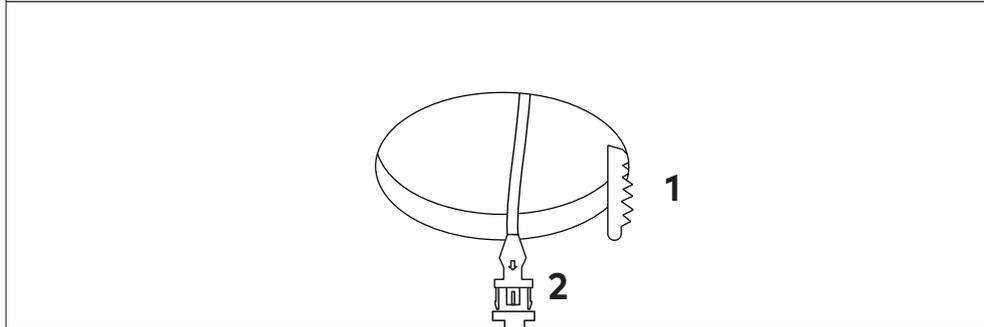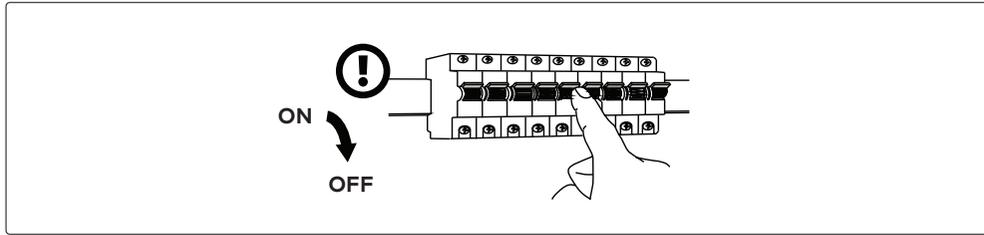


Wiring

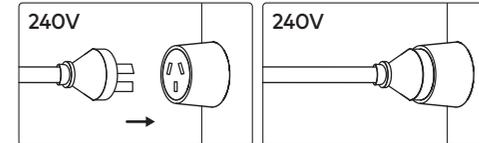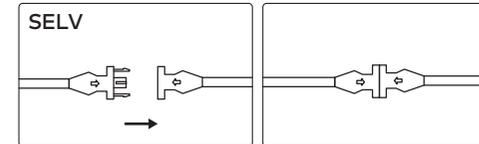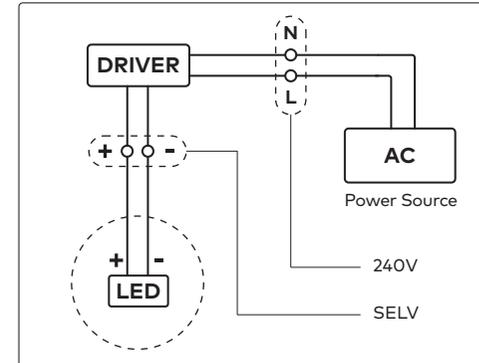

Tunable White Wiring

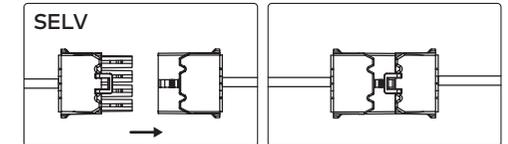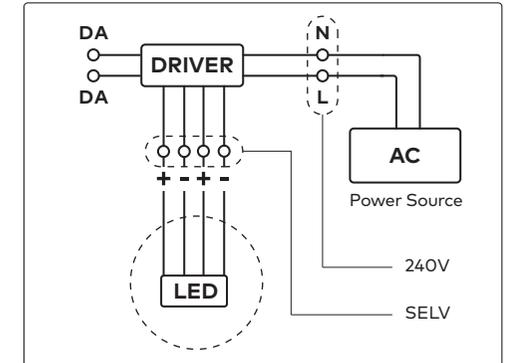

Additional Accessories

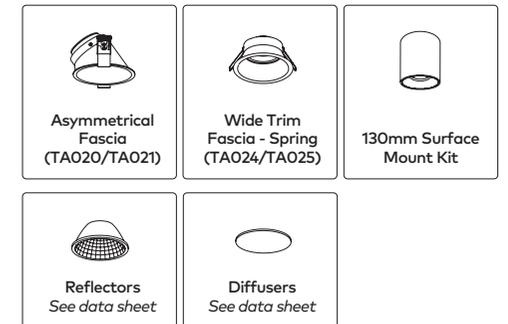

Luminaire Compatibility

Product Code	Output Power	Driving Current	Forward Voltage
TITA0084	11W	300mA	35-37V
TITA0100	13W	350mA	
TITA0134	25W	700mA	
TI970084	11W	300mA	
TI970100	13W	350mA	
TI970134	25W	700mA	

Dimming

This luminaire can be dimmed. Unios® recommends a phase-cut dimmer or DALI solution optimised for LED technology.

For full list of compatible drivers, see unios.com

