
PURATI


_Τ Model Voltage Current PF Wattage Luminous Flux **₩/Φ (mm) H (mm) ta(**℃) 500/1000LM(Warm W 220-240V~ 0.07A/0.05A 0.9 15W/10W 210 56 40 Slice Square 210 1500/1000LM(Neutral Whit 500/1000LM(Cool White) Suitable Version: Non-Dimmable and Dimmable luminaire with or without color temperature selectable function Color Temperature: Warm White:2700K-3200K Neutral White:3800K-4200K Cool White:6000K-6600K; X RoHS CE $|\Box|$ **IP54** Installation instruction (1) (2a) 2b QQR Dr

3 DC PLUG IN AC IN



Clic

Light source disassembly instruction

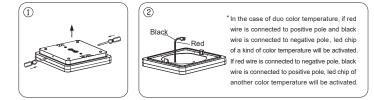

- Always follow this instruction to ensure correct and safeinstallation and functioning of the luminaire and keep it for future reference.
- Always isolate the power before commencing installation.
- If in doubt, consult a qualified electrician. Ensure that youalways install the luminaire to the relevant regulations.
- NOTE: The illuminators of luminaires are non-identical between different models or between same model with different function. Mixed use will lead malfunction of the luminaries or working improperly. Please follow the color label to install if has (e.g red label matches red label).

MANUFACTURER DOES NOT TAKE ANY RISKS AND RESPONSIBILITIES ARISING FROM NON-STANDARDOPERATION.

Correct Disposal of this product



This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

PURATI



Model	Voltage	Current	PF	Wattage	Luminous Flux	W/Φ (mm)	H (mm)	ta(°C)
Slice Square 210	220-240V~	0.07A/0.05A	0.9	15W/10W	1500/1000LM(Warm White) 1500/1000LM(Neutral White) 1500/1000LM(Cool White)	210	56	40
Suitable Version: Non-Dimmable and Dimmable luminaire with or without color temperature selectable function. Color Temperature: Warm White:2700K-3200K Neutral White:3800K-4200K Cool White:6000K-6600K;								









Installation instruction

RoHS

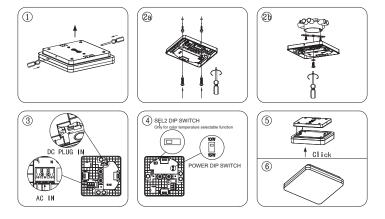

Light source disassembly instruction

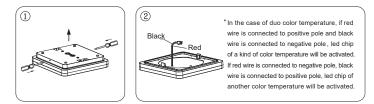

- Always follow this instruction to ensure correct and safeinstallation and functioning of the luminaire and keep it for future reference.
- Always isolate the power before commencing installation.
- If in doubt, consult a qualified electrician. Ensure that youalways install the luminaire to the relevant regulations.
- NOTE: The illuminators of luminaires are non-identical between different models or between same model with different function. Mixed use will lead malfunction of the luminaries or working improperly. Please follow the color label to install if has (e.g red label matches red label).

MANUFACTURER DOES NOT TAKE ANY RISKS AND RESPONSIBILITIES ARISING FROM NON-STANDARDOPERATION.

Correct Disposal of this product



This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.