


Switch Large (140mm) Adjustable Downlight, Textured White/Black, 4000K

SWIT0140.TW40.N-FP060001

Availability: **Standard** (This item is generally stocked, please check with your Unios distributor)

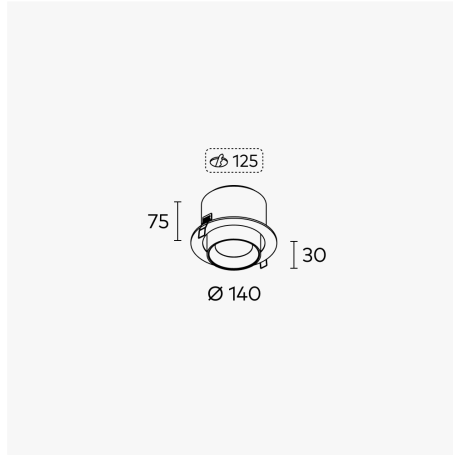

Downloads

- [BIM Object - Sketchup](#)
- [BIM Object - Revit](#)
- [IES File](#)
- [Installation Instructions](#)

Key Product Info

- 21W (600mA)
- 4000K (1812lm)
- Textured White/Black
- 35°

Driver

Name	Unios G2 600mA Flicker-Free Phase-Cut Driver
Product Code	FP060001
Driver Location	Remote
Control Type	Phase-cut dimmable
Measurements (LxWxH)	170x45x30mm
Current output maximum	600mA

Design Specifications

Material	Powder Coated Aluminium
Height	75mm
Diameter	Ø140mm
Tilt	90°
Weight	1100g
Family Name	Switch Adjustable Downlight


Performance Specifications

Lumens	1812lm
IP Rating	IP20
CRI	92+ (R9: >50)
Efficacy	Up to 86.29lm/W
UGR	<19
Lifetime	>55,000h L90B10
LED Type	COB
SDCM	≤2
COI Compliance	N/A
Warranty	5 Years

Installation Specifications

Remote Mount	Yes
Insulation Rating	IC
Cutout Size	125mm
Class Rating	Class II

Photometrics



Cone Diagram

